

# Dome Network Camera PW214-I28



## Key Features



## Optics

- Day/night functionality
- Smart IR, up to 30m (98ft) IR distance
- 3D DNR (Digital Noise Reduction)

## Compression

- Ultra 265, H.265, H.264, MJPEG
- ROI (Region of Interest)

## Network

- ONVIF Conformance

## Structure


- Wide temperature range: -30°C ~ 60°C (-22°F ~ 140°F)
- Wide voltage range of  $\pm 25\%$
- IP67
- 3-Axis

# Specifications

| Model No.               | PW214-I28  |            |                |                   |              |
|-------------------------|--|------------|----------------|-------------------|--------------|
| <b>Camera</b>           |  |            |                |                   |              |
| Sensor                  | 1/3", 4.0megapixel, progressive scan, CMOS   |            |                |                   |              |
| Lens                    | 2.8mm@F2.0   |            |                | 4.0mm@F2.0        |              |
| DORI Distance           | Lens (mm)  | Detect (m) | Observe (m)    | Recognize (m)     | Identify (m) |
|                         | 2.8  | 63         | 25.2           | 12.6              | 6.3          |
|                         | 4.0  | 90         | 36             | 18                | 9            |
| Angle of view (H)       | 104.4°   |            |                | 78.9°             |              |
| Angle of View (V)       | 54.4°  |            |                | 39.6°             |              |
| Angle of View (O)       | 135.7°   |            |                | 97.0°             |              |
| Adjustment angle        | Pan: 0° ~ 360°   |            | Tilt: 0° ~ 80° | Rotate: 0° ~ 360° |              |
| Shutter                 | Auto/Manual, 1 ~ 1/100000s   |            |                |                   |              |
| Min. Illumination       | Color: 0.03Lux (F2.0, AGC ON)<br>0Lux with IR  |            |                |                   |              |
| Digital noise reduction | 2D/3D DNR  |            |                |                   |              |
| Day/Night               | IR-cut filter with auto switch (ICR)   |            |                |                   |              |
| S/N                     | >52dB  |            |                |                   |              |
| IR Range                | Up to 30m (98 ft) IR range   |            |                |                   |              |
| Wavelength              | 850nm  |            |                |                   |              |
| IR On/Off Control       | Auto/Manual  |            |                |                   |              |
| Defog                   | Digital Defog  |            |                |                   |              |
| WDR                     | DWDR   |            |                |                   |              |
| <b>Video</b>            |  |            |                |                   |              |
| Video Compression       | Ultra 265, H.265, H.264, MJPEG   |            |                |                   |              |
| H.264 code profile      | Baseline profile, Main Profile   |            |                |                   |              |
| Frame Rate              | Main Stream: 4MP (2592*1520), Max 20fps;<br>Sub Stream: 720P (1280*720), Max 20fps;<br>Third Stream: D1 (720*576), Max 20fps |            |                |                   |              |
| Video Bit Rate          | 128 Kbps~16 Mbps   |            |                |                   |              |
| OSD                     | Up to 4 OSDs   |            |                |                   |              |
| Privacy Mask            | Up to 4 areas  |            |                |                   |              |
| ROI                     | Up to 2 areas  |            |                |                   |              |
| Motion Detection        | Up to 4 areas  |            |                |                   |              |
| Analytics               | Cross Line, Intrusion detection  |            |                |                   |              |
| <b>Image</b>            |  |            |                |                   |              |
| White Balance           | Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2  |            |                |                   |              |
| Digital noise reduction | 2D/3D DNR  |            |                |                   |              |
| Smart IR                | Support  |            |                |                   |              |
| Flip                    | Normal/Vertical/Horizontal/180°  |            |                |                   |              |
| De warping              | NA   |            |                |                   |              |
| HLC                     | Supported  |            |                |                   |              |
| BLC                     | Supported  |            |                |                   |              |

| Network                |  |
|------------------------|--|
| Protocols              | IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, QoS |
| Compatible Integration | ONVIF (Profile S, Profile T), API  |
| Client                 | EZ Station, EZ View, EZ Live   |
| Web Browser            | Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below                                    |
|                        | Plug-in free live view: Chrome 57.0+, Firefox 58.0+, Edge 16+, Safari 11+                                      |
| Interface              |  |
| Network                | 10/100M Base-TX Ethernet   |
| Certifications         |  |
| Certifications         | CE: EN 60950-1<br>UL: UL60950-1 FCC: FCC Part 15   |
| General                |  |
| Power                  | DC 12V±25%, PoE (IEEE 802.3af)   |
|                        | Power consumption: Max 4W  |
| Dimensions (Ø x H)     | Ø118 x 96mm (Ø4.6" x 3.8")   |
| Net Weight             | 0.35kg (0.77lb)  |
| Material               | Metal + Plastic  |
| Working Environment    | -30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)   |
| Storage Environment    | -30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)   |
| Surge Protection       | 2KV  |
| Ingress Protection     | IP67   |

## Dimensions

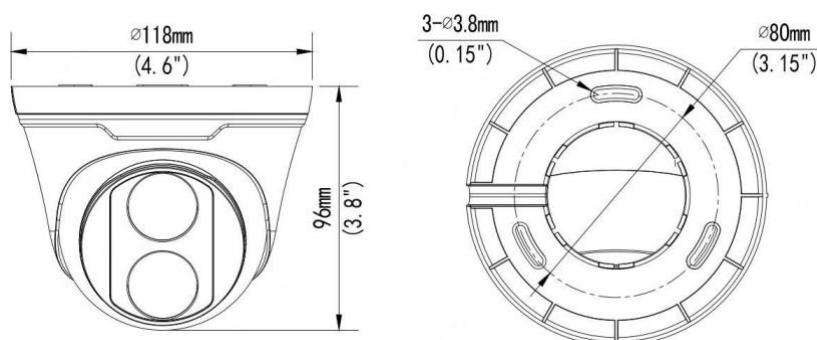

# Accessories

TR-JB03-G-IN



TR-JB07/WM03-G-IN



TR-WM03-D-IN



TR-UP06-IN



TR-A01-IN



TR-SE24-IN





TR-SE24-A-IN



TR-CM24-IN



| Junction Mount  | Pole Mount  |
|---|---|
| TR-JB03-G-IN  | TR-JB07/WM03-G-IN(TR-WM03-D-IN)+TR-UP06-IN  |
|  |  |

Sales@petawise.com; Marketing@petawise.com  
www.petawise.com