


6EP+2GP+2G Outdoor PoE Switch

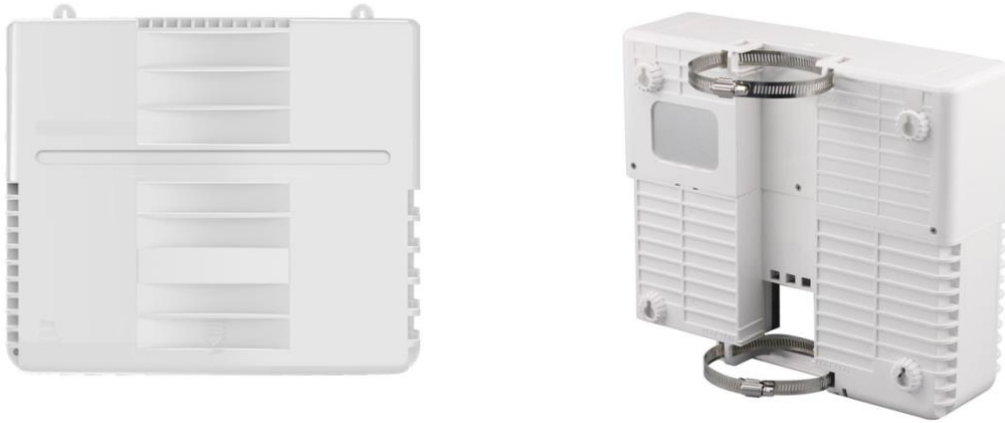

Product Features

- Using CAT.5 network patch cords support power for the wireless AP and IP camera
- Networking standard: IEEE802.3af/t
- Long distance transmission and power supply, maximum transmission distance is 130m.
- Upload port automatic flip (Auto MDI / MDIX)
- Network performance: Store-and-forward
- Intelligent power distribution and secure power supply system
- Power circuit protection function can protect environment
- Zero configuration feature power supply is automatically supplied to the adaptive equipment
- Professional thunder design, Overtemperature protection, short circuit protection, high reliability, high stability
- Nature cooling, small, compact, mute, all the designs are convenient for you to put.
- Support: port no-load saving power.
- 10/100/1000Mbps 7-8 port up-link or PoE port can be converted to each other

Ordering Information

Model	Comment
PW2020-6T2G-POE-EX	6EP-2GP-2G Outdoor PoE Switch

Product Specifications

Model	PW2020-6T2G-POE-EX
Network port	PoE (1~8)/ up-Link (7~8) and L1,L2 ,Orange port is Gigabit port
Transmission Rate	1000Mbps Full Duplex; 10 or 1000Mbps Half Duplex
	Network Interface: 10BASE-T or 1000BASE-TXRJ45 port of Ethernet
Performance & Specification	Bandwidth: 9.2 Gbps
	Network Latency (10 to 1000Mbps): $\leq 20\mu s$ (use the 64 byte package size)
	MAC address table: 8K
	The Frame Filter & Transmission Rate: 14800pps the most for 10Mbps port, 1488000pps the most for 1000Mbps port
Networking Standard	IEEE 802.3i 10BASE-T
	IEEE 802.3u 100BASE-TX/ IEEE802.3AB 1000BASE-T gigabit
	IEEE 802.3xFlowControl
	IEEE 802.3af/at Power over Ethernet
PoE Core Of Power Cable	Default: 1/2(+), 3/6(-); (Can Be Selected 4/5(+), 7/8(-)).
PWR Light	PWR Light no extinguish
Power Support	Power input: AC 180~240V 120W Power output: PoE1~8Port1/2(+52V),3/6(GN)
Physical Specifications	Size(L*W*H)
	310mm x 260mm x 100mm
Working Environment	Operating Temperature: -20°C ~55°C
	Storage Temperature: -40°C ~70°C
	Operating Humidity: 10%~90% non-condensing
	Storage Humidity: 5%~90% non-condensing
Electromagnetic Compatibility	CE mark
	FCCPart15, Class B
	VCCI ClassBEN55022 (CISPR 22)
	C-Tick
Package Content	AC Power Cable、 Installation Manual Warranty Card

Petawise Inc.

Unit 8-9, 1040 Martin Grove Road, Etobicoke, Ontario, Canada M9W 4W1
 Sales@petawise.com; Marketing@petawise.com
 www.petawise.com

**Product specifications and availability are subject to change without notice.*